

Mobile Operator Station


For versatile deployment of Thruvision's proven people-screening cameras

Enables security and border control professionals to rapidly deploy Thruvision passive people-screening cameras wherever they are required without disrupting existing infrastructure and protocols.

Feature	Benefit
Portable integrated solution	Turn-key solution Operational within minutes once connected to power supply Deployment flexibility to suit existing infrastructure, protocols and traffic flow
Light weight	Easily portable by one operator
Compact size	Rapid deployment in diverse screening locations where space is limited
Incorporates power and data networking electronics	Simple quick connection for single or multiple camera use
Optional laptop shelf	Maximum flexibility around deployment options

Designed for indoor use in:

- Airports
- Border crossings
- Cruise terminals
- Seaports
- Concourses, foyers and public areas
- Events and venues
- Warehouses and factories

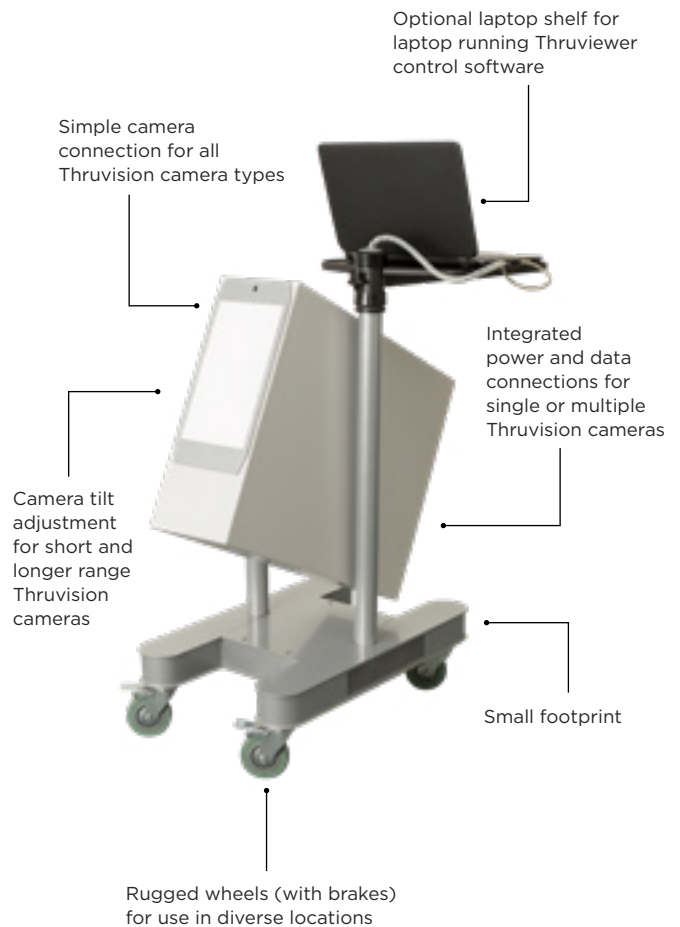

TS4-C on Mobile Operator Station with optional laptop shelf fitted.

Mobile Operator Station

For versatile deployment of Thruvision's proven people-screening cameras

Technical specifications



Weight:	29kg (64lbs) 56kg (123lbs) including TS4 and laptop PC
Power consumption:	Less than 175W (depending on laptop PC battery charge state)
Operating voltage:	90V AC to 264V AC, 47 to 63Hz
External connections:	Mains AC (power), Ethernet (data)
Dimensions (h x l x w)	1085 x 710 x 455mm (42.7 x 28.0 x 17.9in)
Screening distance:	Compatible with full range of Thruvision cameras See Thruvision camera specification sheets
Operational temperature range:	5°C to 35°C (41°F to 95°F)
Operational environment:	Indoor, dry and air-conditioned location

PART NUMBER: TV-STMOB

<http://www.thruvision.com/mobile-operator-station>

Operational characteristics

- Integrated 'turn-key' mobile solution, operational in minutes once connected to power supply
- Enables Thruvision cameras to be easily positioned for best use in diverse locations
- Small footprint and integrated operator display stand enables local or remote operation by a single operator
- Rugged wheels for easy relocation across a facility
- Integrated power and network switch for stand-alone use or operation within a wider security network

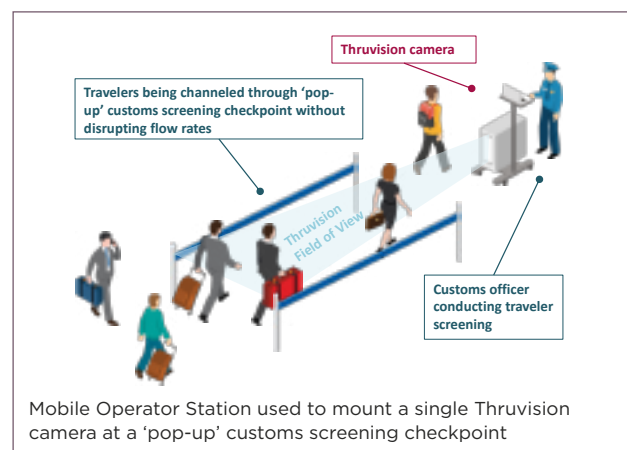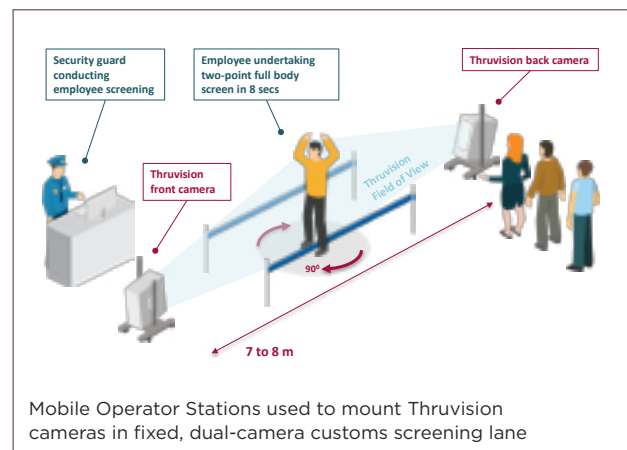

THRUVISION

info@thruvision.com
thruvision.com

UK t: +44 (0) 1235 436180
US t: +1 (540) 878-4844

E&OE. Specifications subject to change without notice.

July 2018 v1.2