

Tactical Deployment System

For rapid self-contained deployment of Thruvision's proven people-screening cameras

Provides law enforcement, border control and security industry professionals with complete freedom to rapidly deploy Thruvision passive people-screening cameras wherever necessary without being restricted by lack of power or other infrastructure.

Designed for indoor use in:

- Airports
- Border crossings
- Cruise terminals
- Seaports
- Concourses, foyers and public areas
- Events and venues
- Warehouses and factories

Feature	Benefit
Portable integrated solution	Turn-key solution Operational within minutes of power-on Deployment flexibility to suit existing infrastructure, protocols and traffic flow
Highly manoeuvrable	Easily portable by one operator
Compact size	Rapid deployment in diverse screening locations where space is limited
Incorporates power and data networking electronics	Simple quick connection for single or multiple camera use
Integrated battery power system	Allows Thruvision to be used for up to 8 hours without requiring mains power



Tactical Deployment System


For rapid self-contained deployment of Thruvision's proven people-screening cameras

Technical specifications

Weight:	63kg (139lb) without batteries
Power consumption:	<175W (depending on laptop battery charge state)
Dimensions (with handle) (h x l x w):	1140 x 1000 x 540mm (44.9 x 39.4 x 21.3in)
Dimensions (no handle) (h x l x w):	1140 x 830 x 540mm (44.9 x 32.7 x 21.3in)
Operating temperature range:	5°C to 35°C (41°F to 95°F)
Operational environment:	Indoor, dry and air-conditioned location
Battery charging system:	Weight: 1.8kg (4lb) not including batteries, wiring or connectors Dimensions: W 256mm (10.0in) x L 180mm (7.0in) x 88mm (3.5in) Output Voltage: 18V to 27V possible, but typically 22V to 25V when discharging Output current: < 10A on each output connector simultaneously (each fused at 10A)
Battery charge time:	Approx. 6 to 8 hours
Operational run time on battery power:	Approx. 8 hours (with 2 x 110Ah AGM leisure batteries installed)

Operational characteristics

- Built-in batteries, battery charger and power inverter providing 8 hours operation with 2 x 110Ah leisure batteries
- Mounts full range of Thruvision cameras with fold away stand for laptop
- Rugged wheels and protective chassis designed for ease of movement across uneven surfaces
- Integrated mains power and network switch for normal operation where local infrastructure exists

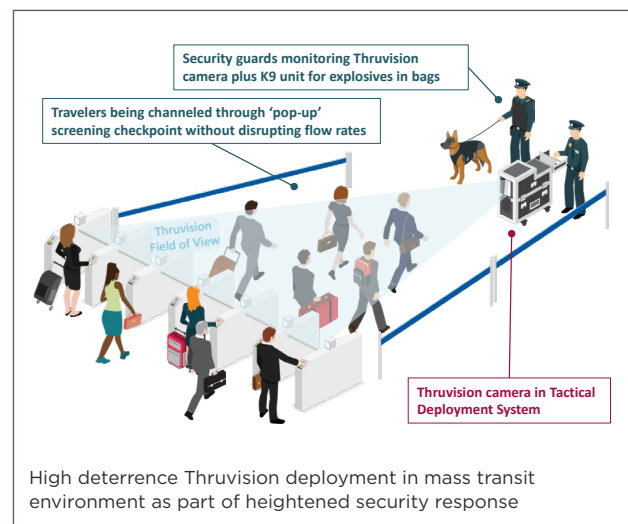

PART NUMBER: TV-STTDS

THRUVISION

info@thruvision.com
thruvision.com

UK t: +44 (0) 1235 436180
US t: +1 (540) 878-4844

E&OE. Specifications subject to change without notice.

July 2018 v1.1